MST

max speed technology



FXX-D S IFS

1 / 10 DRIFT CHASSIS

INSTRUCTION MANUAL

ON ROAD USE ONLY
FULL BALL BEARINGS

WHEELBASE :	STANDARD 257mm (adjustable)
WIDTH :	STANDARD 190mm (adjustable)
GEAR RATIO :	2.12 (36T/17T)
CASTER :	8 degrees variableness

www.rc-mst.com

※SPECIFICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE

FXX-D S IFS

1 / 10 DRIFT CHASSIS

MST max speed technology

FXX-D S IFS

Please read this additional instructions before assembly.

Please change below FXX-D S assembly steps for **FXX-D S IFS** conversion.

1. BAG **2** STEP 1
2. BAG **11**
3. BAG **14** STEP 1 ~ STEP 4
4. BAG **15** STEP 2

Please refer both FXX-D S and this additional instructions.

FXX-D S IFS

此版本說明書是以附加的方式呈現，組裝前請詳閱本說明書後再執行組裝!

FXX-D S 變更為 **FXX-D S IFS** 的組裝步驟如下:

1. BAG **2** STEP 1
2. BAG **11**
3. BAG **14** STEP 1 ~ STEP 4
4. BAG **15** STEP 2

組裝時請同時參閱FXX-D S說明書與此說明書!


PARTS BAG 2

FRONT LOWER ARM
前下擺臂

BAG 19

- 3×5.8×4 spacer ×2
  墊片
  230004
- M3×14 screw ×2
  圓頭螺絲
  110061

STEP 1 Front lower arm assembly
前下擺臂組裝

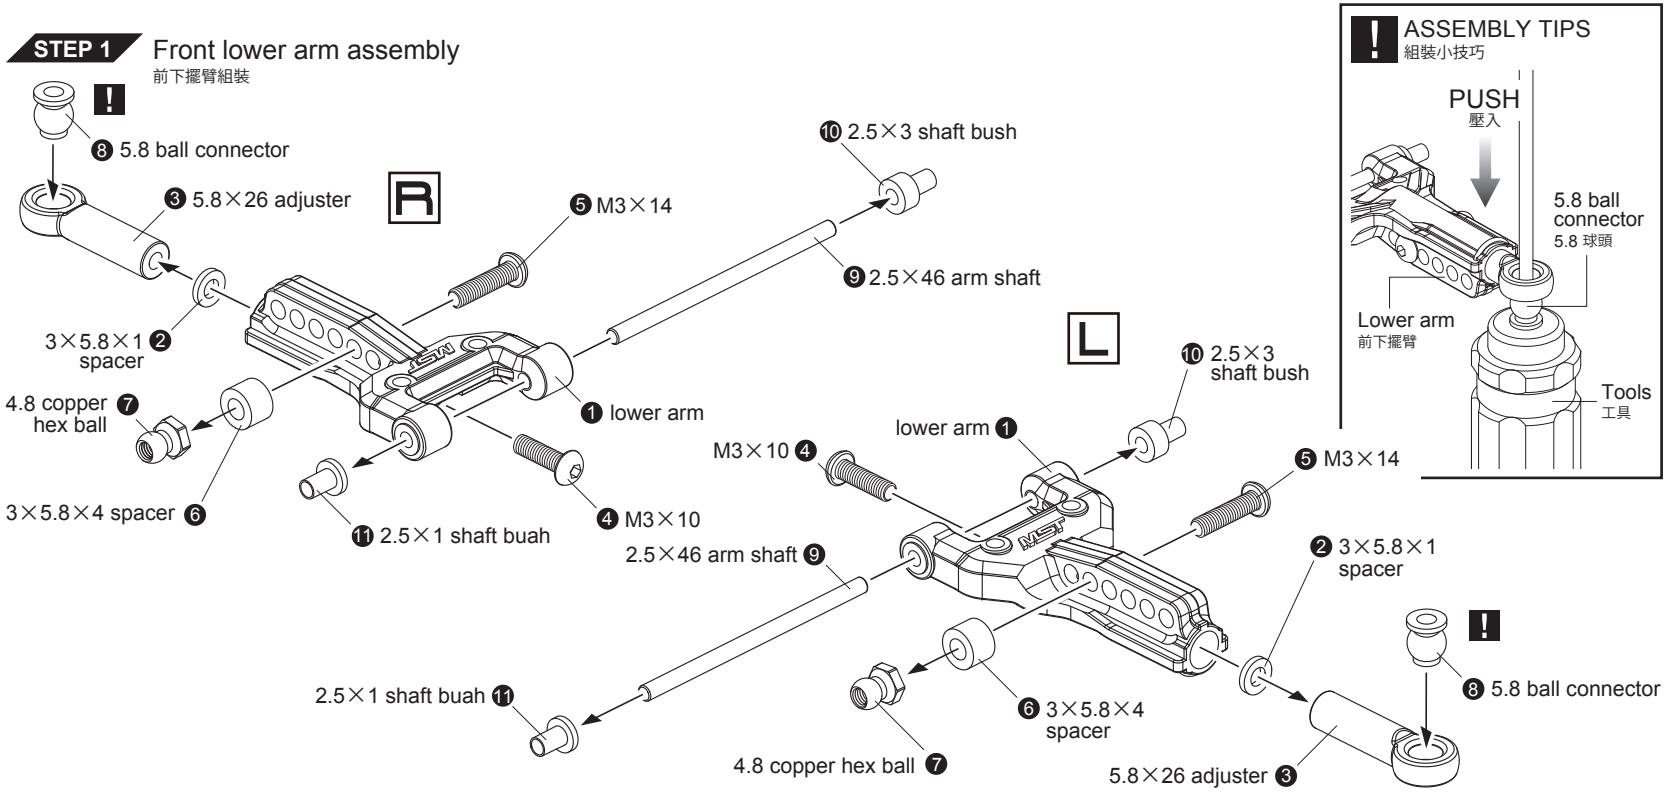


BAG 19

M3×12 screw ×4
圓頭螺絲
110029


Damper holder ×2
避震器固定座
230004

STEP 1 Attaching upper deck
安裝二樓板

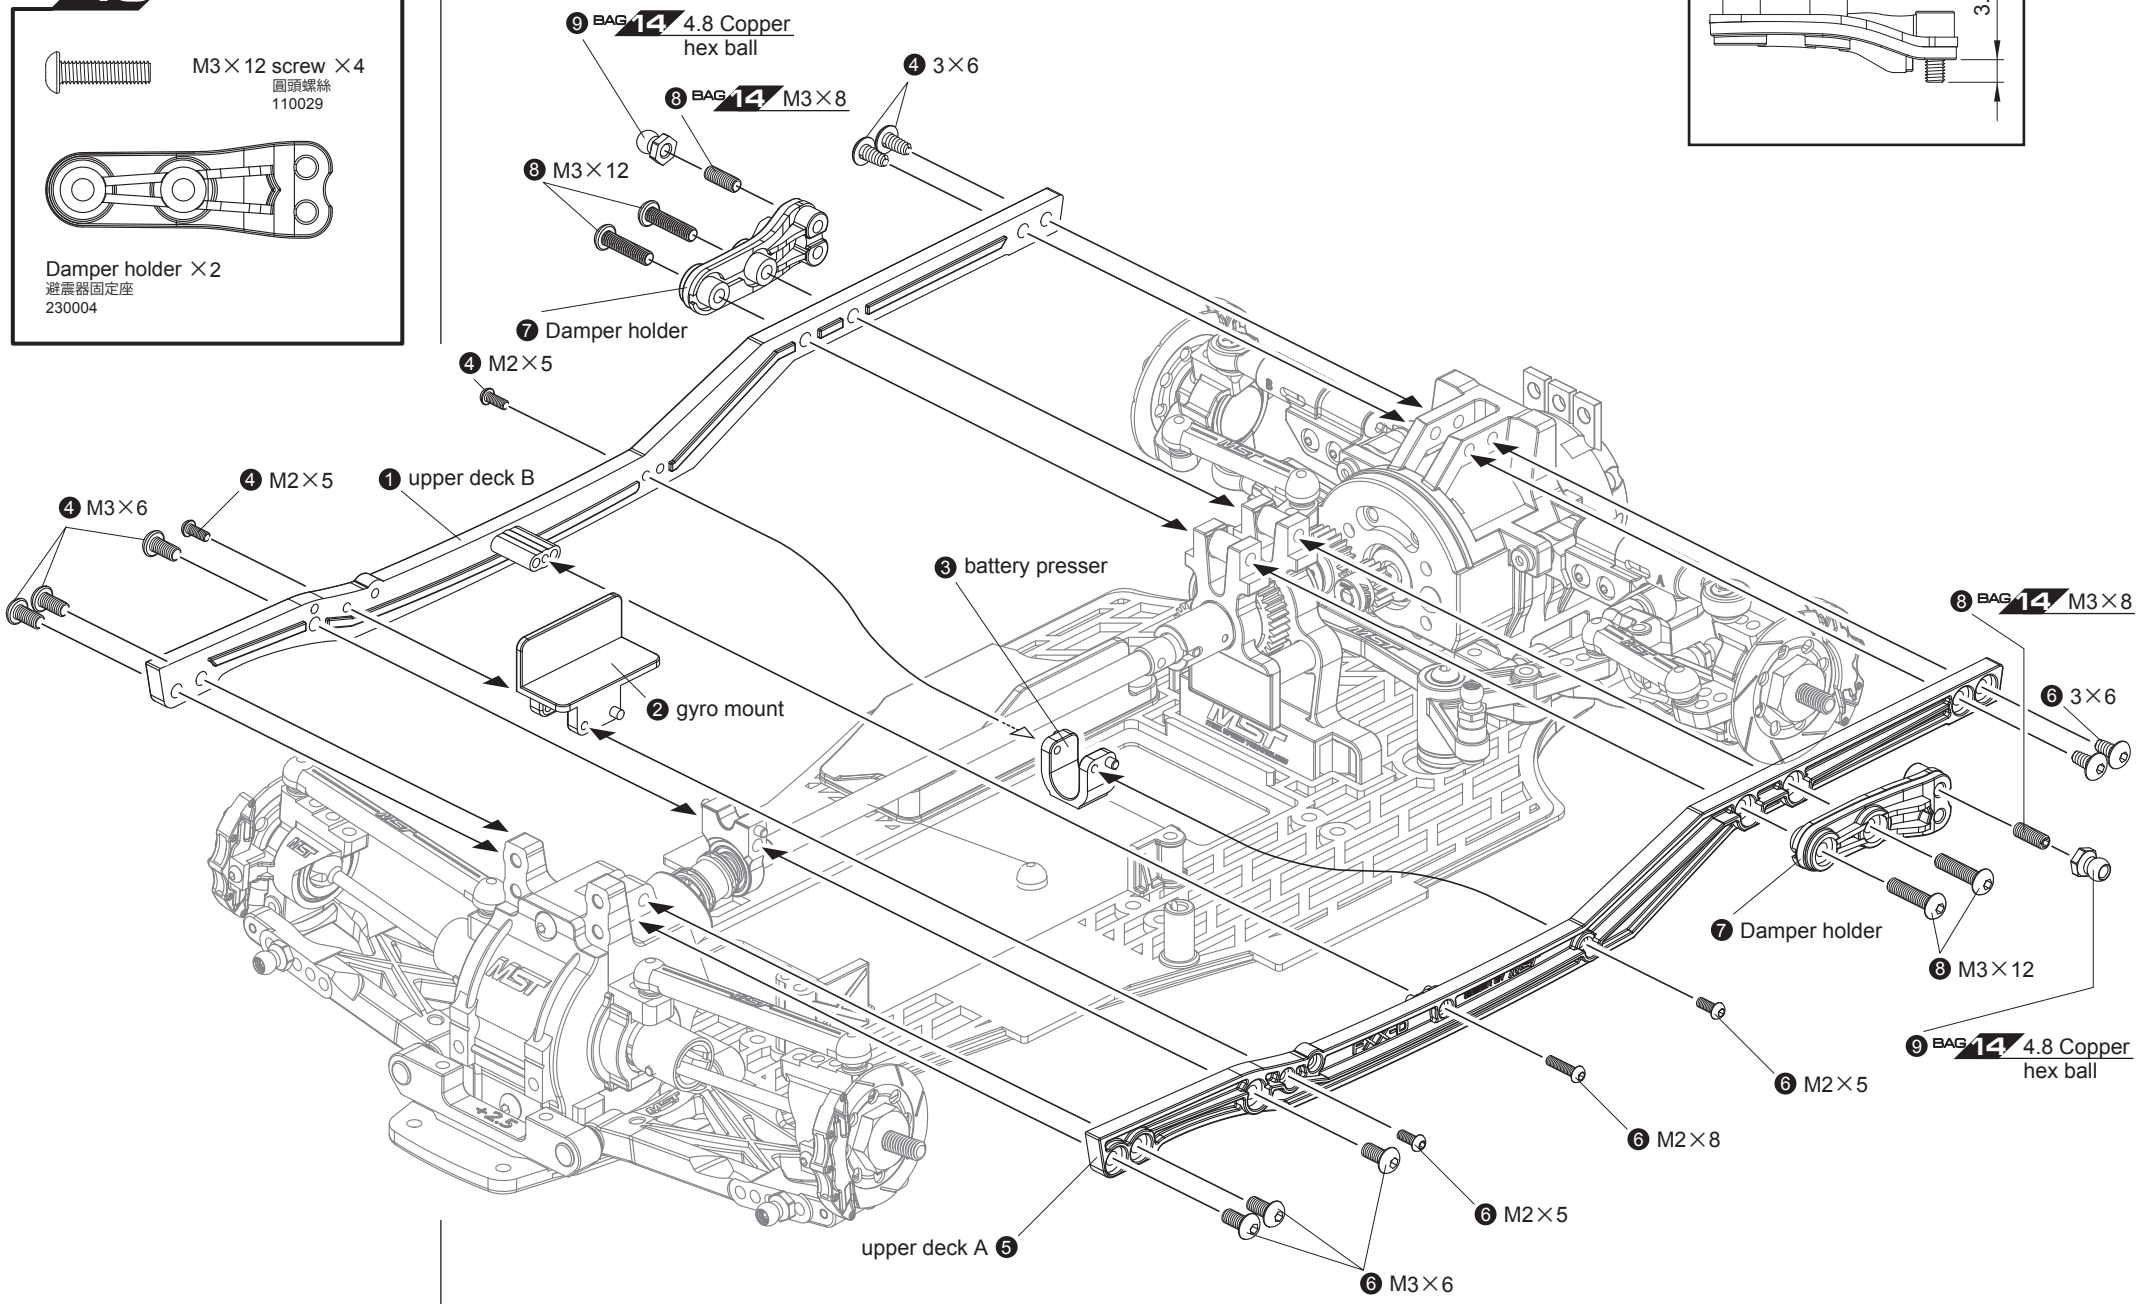

PARTS BAG 14 ◄ DAMPER STAY
避震架

BAG 19

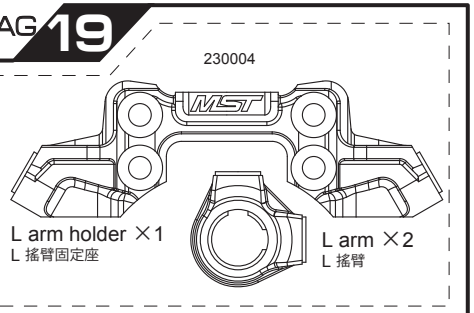

4.8×4.5 copper ball connector ×4
310054 銅製球頭螺絲

M3×12 screw ×2
110029 圓頭螺絲


M3×20 screw ×2
110009 止付螺絲

4.8×18 adjuster ×4
210095 拉桿頭


5×8×2.5 Bearing ×4
軸承
120017

Ball bearing seat ×2
培林固定座
210245


STEP 1 L arm assembly
L搖臂組裝

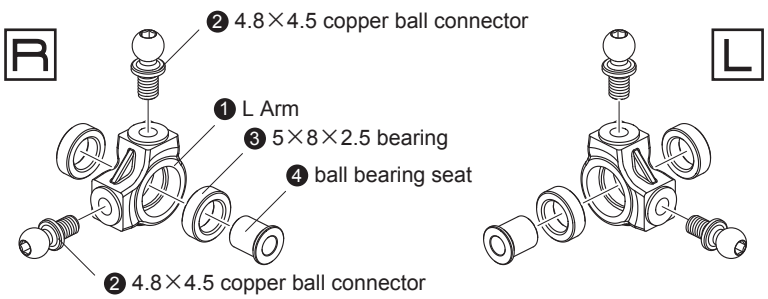


STEP 2 Turnbuckle assembly
拉桿組裝

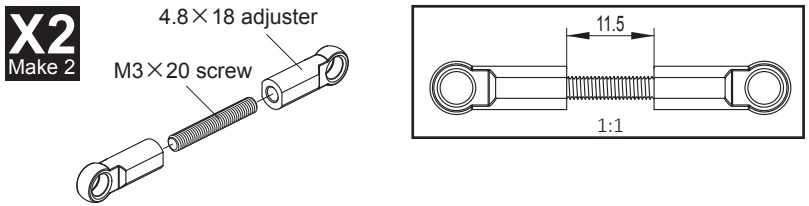

STEP 3 Attaching L arm holder
安裝L臂固定座

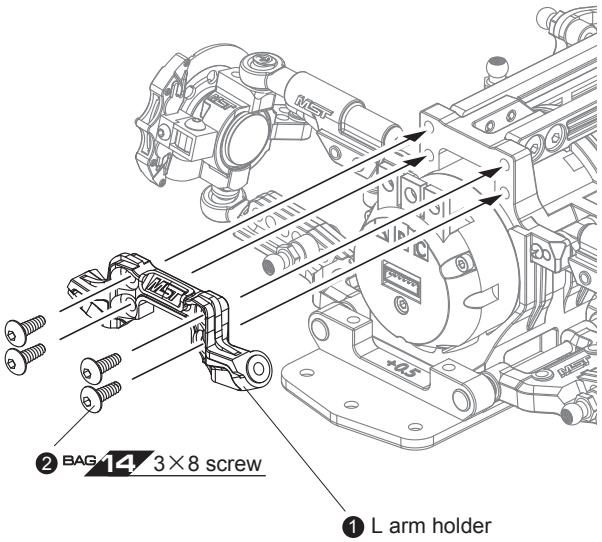


STEP 4 Attaching L arm
安裝L搖臂

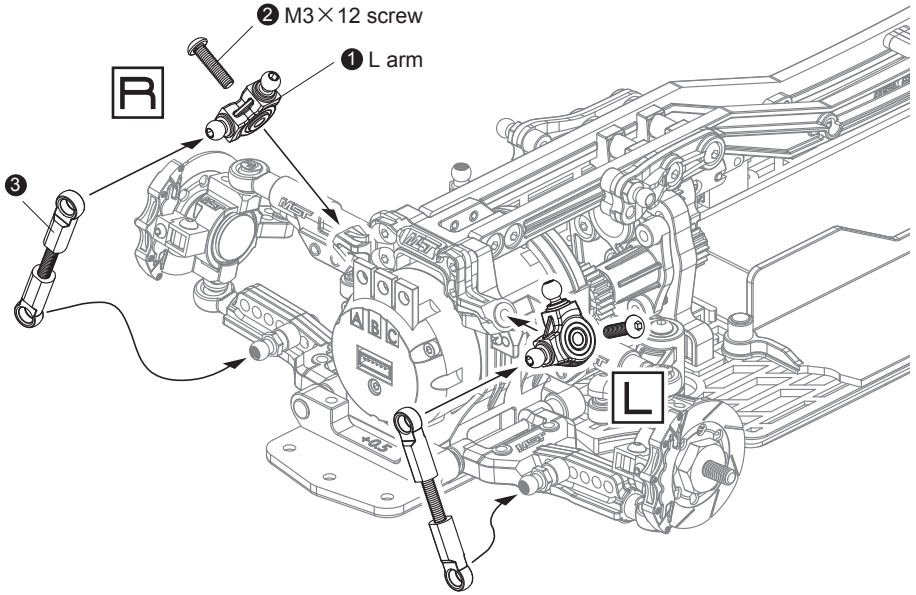

PARTS BAG 15 ◄ DAMPER
避震器

STEP 2 Attaching front damper
安裝前避震器

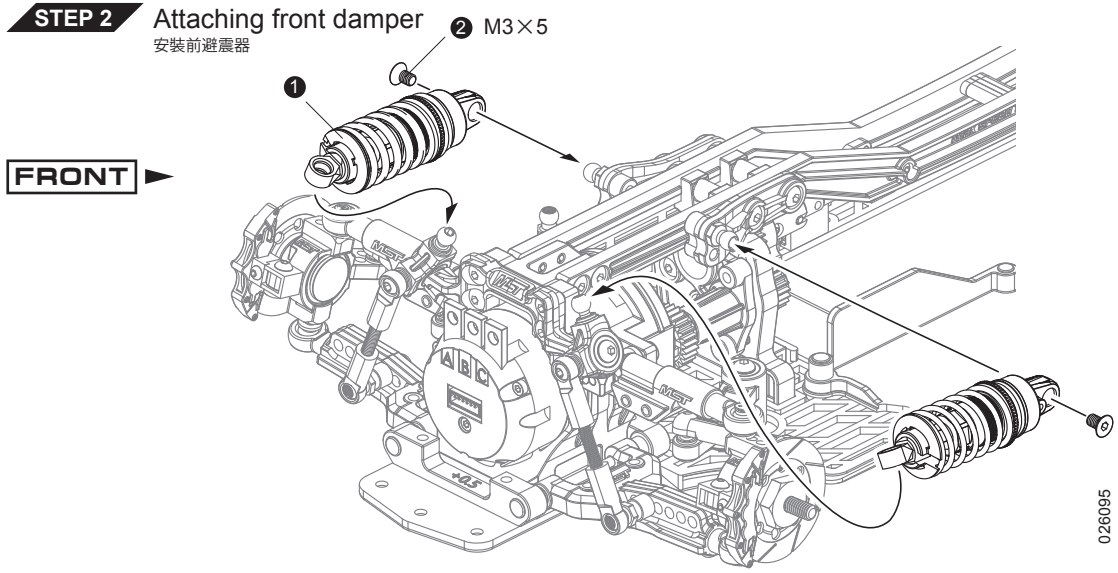

026095