


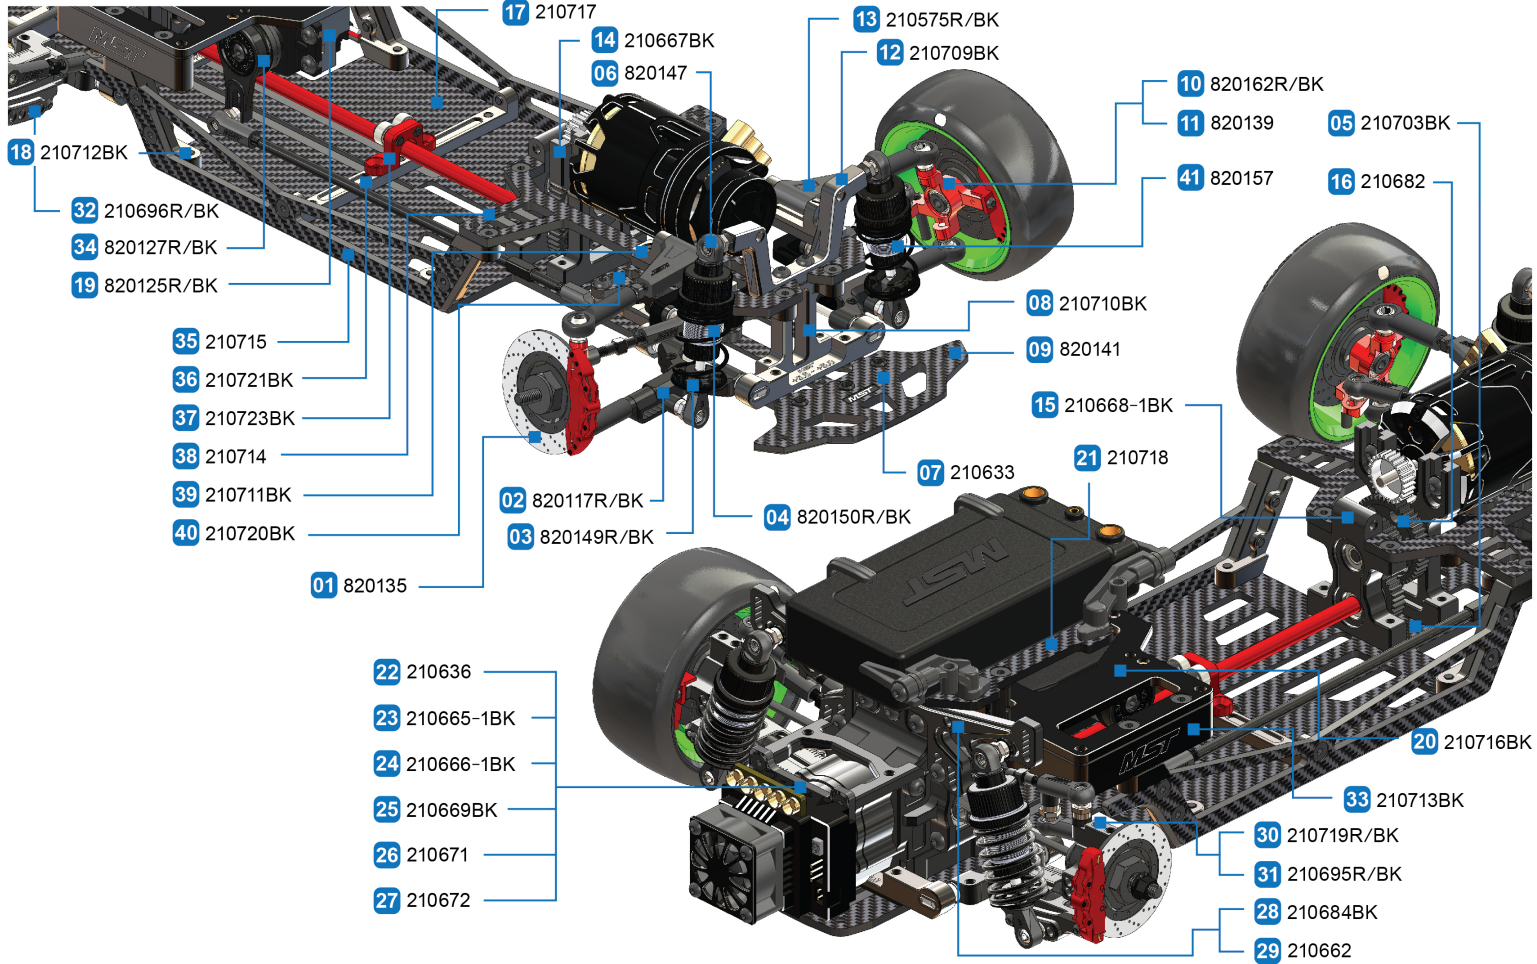


FACTORY SETTINGS FOR ALL UPGRADED PARTS OF THE FRX

FRX全升級原廠設定說明

MST factory recommended mode

It is recommended to use a 380 motor specifically designed for RC drift cars, which will provide higher speeds.

820143R / BK

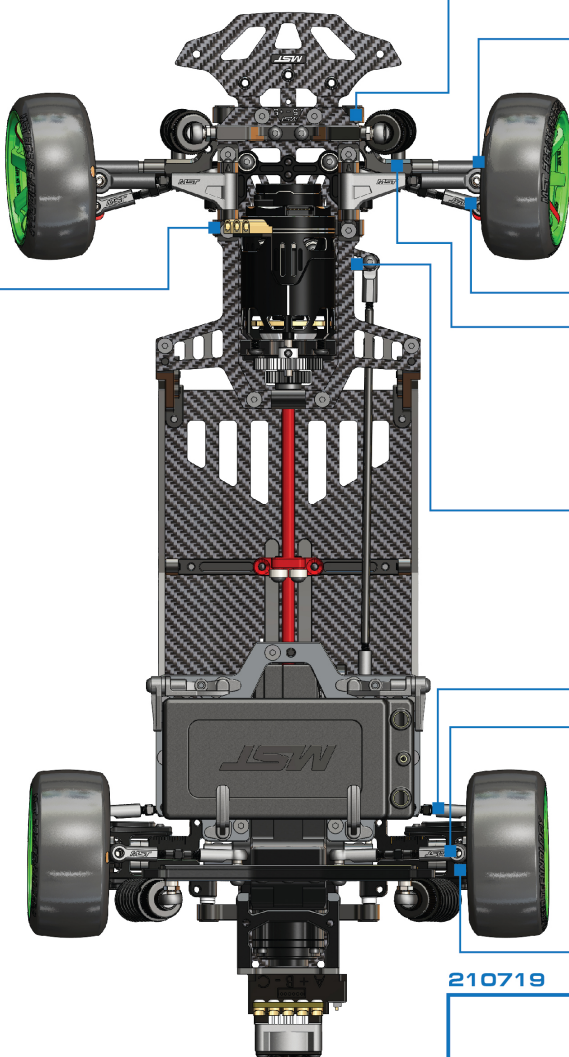


Standard

820162


Alum. spacer
3×5.5×2.0 (5)




210575

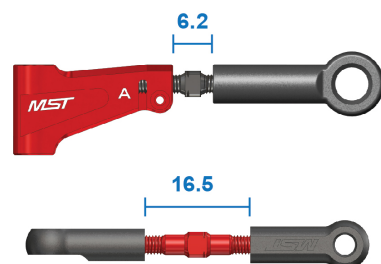


820117R / BK

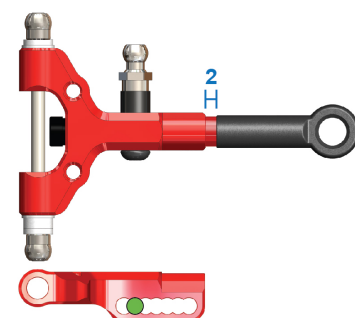


7.6



16.5



ASSEMBLY INSTRUCTIONS

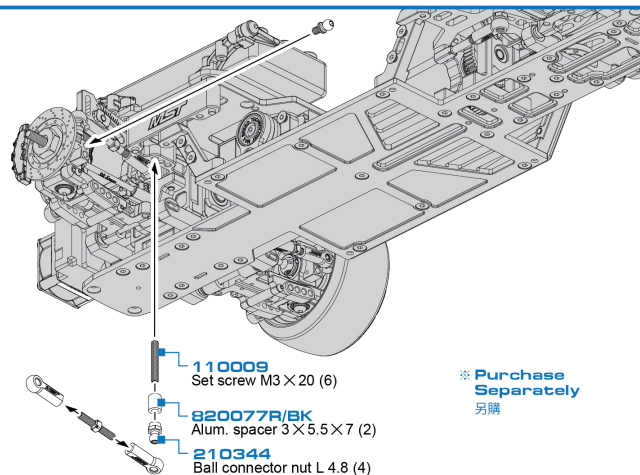

110009
Set screw M3×20 (6)

820077R/BK
Alum. spacer 3×5.5×7 (2)

210344
Ball connector nut L 4.8 (4)

※ Purchase Separately
另購

1. Spring recommendation with
820157 F: Red / R: Purple-Red
2. Ride Height: F 8 / R 5 mm

210719

